DIGITAL SIGNAGE ECOSYSTEM

– Broadcast SaaS –

TIZEN SETUP PROCEDURE


2025 INTERFACE AND LATER

– WWW.WEEZAGO.COM –

TIZEN PROCEDURE – 2025 INTERFACE AND LATER –


1. CHECK THE PLAYBACK MODE

- From the screen's System menu, go to "**Gestionnaire de périphériques externes**". Make sure "**Lire via**" is set to **Application personnalisée**.

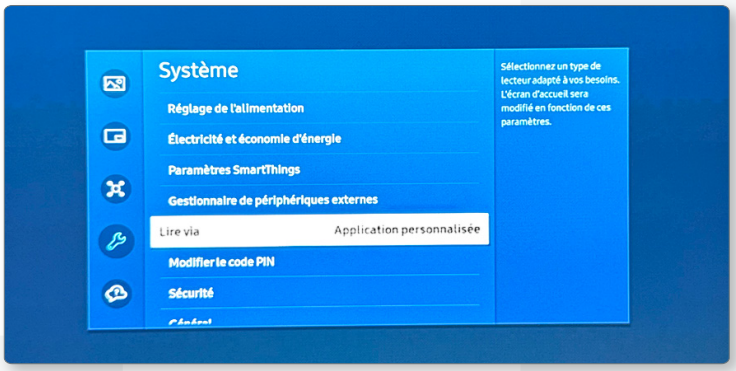


2. SELECT THE LANGUAGE

- At first startup (new screen or after a factory reset), select "**Hi! (English)**".

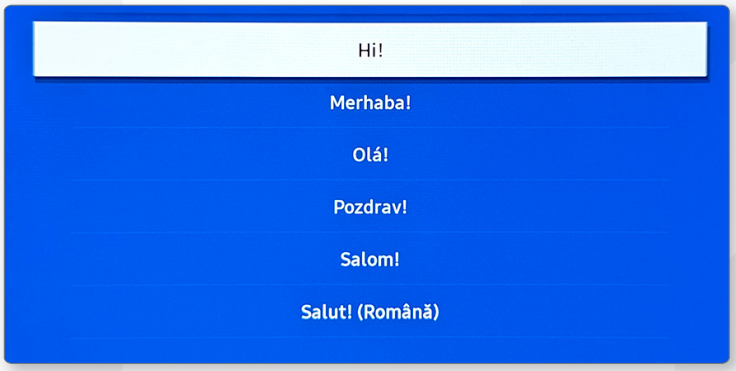

3. NETWORK CONNECTION

- Connect an Ethernet cable. The screen confirms "**Wired Connection. Sucessfull! Your device is connected to the Internet.**" Select "**Next**".

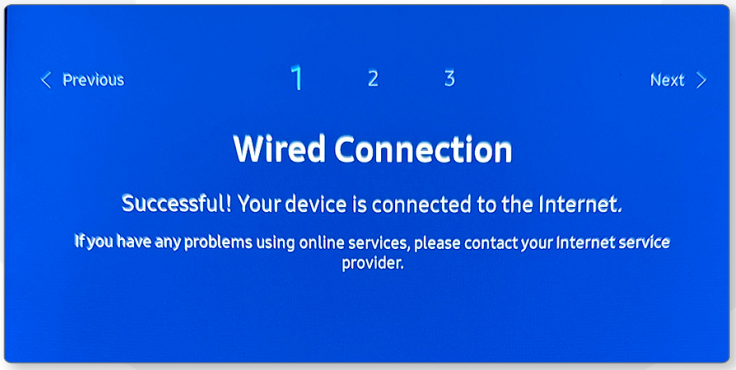


Weezago Ccommunication - 2026 -

TIZEN PROCEDURE – 2025 INTERFACE AND LATER –


4. PRIVACY NOTICE

- On the "**Avis de confidentialité Smart Signage**" Notice screen, select "**OK**".

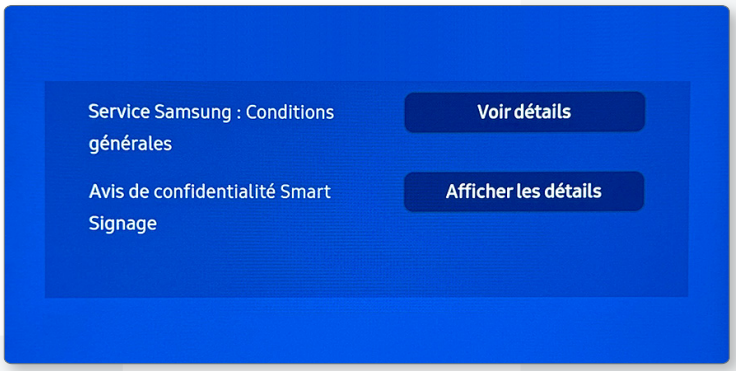


5. SETUP TYPE

- Select "**Manual Setup**".

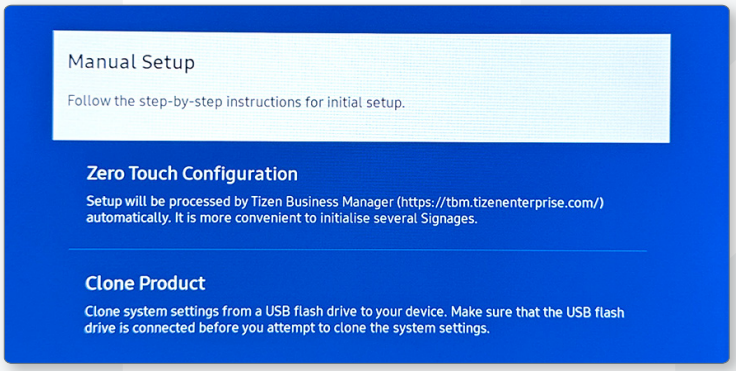

6. DISPLAY ORIENTATION (1/2)

- On the "**Display Orientation**" screen, "**Auto**" is selected by default.

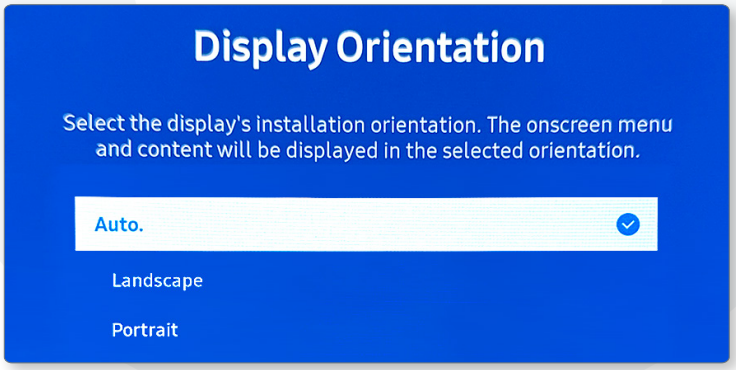


Weezago Ccommunication - 2026 -

TIZEN PROCEDURE – 2025 INTERFACE AND LATER –


7. DISPLAY ORIENTATION (2/2)

- Select "**Portrait**" or "**Landscape**" according to the actual screen installation orientation, then select "**Next**".

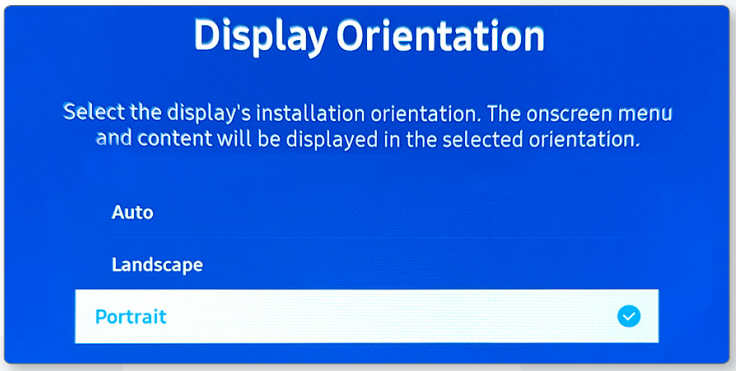


8. PLAYER SELECTION

- Select "**Custom App**". Do not select MagicINFO S Player or VXT Player. Then select "**Next**".

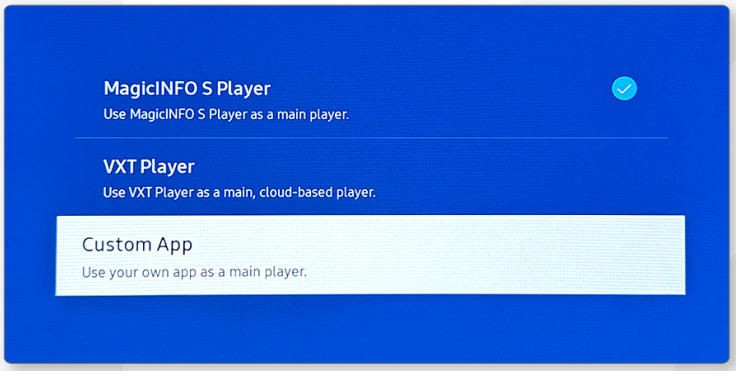

9. ENTER THE PLAYER URL


- In the URL field, enter: **http://soc.weezago.com** then confirm by selecting "**Go**".

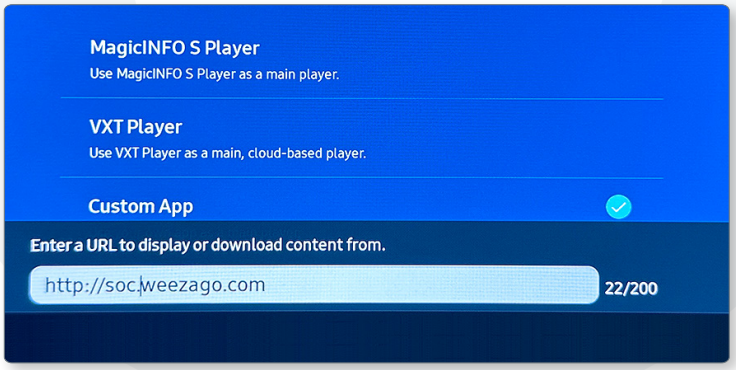

TIZEN PROCEDURE – 2025 INTERFACE AND LATER –


10. RM SERVER CONNECTION

- Leave the default settings unchanged (127.0.0.1) and select "**Skip**".

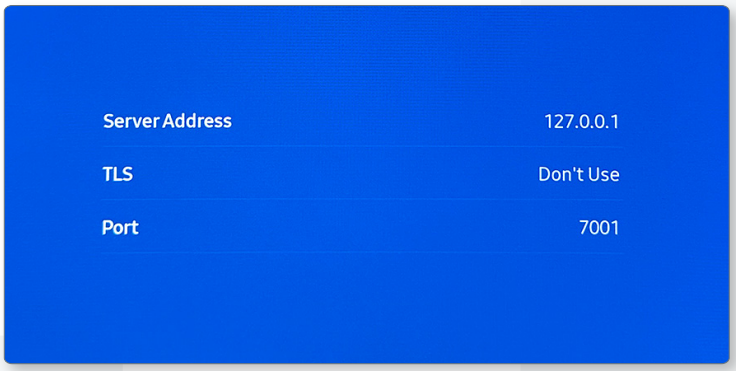


11. AUTO POWER OFF

- Select "**Off**" to disable automatic screen shutdown. This is required for continuous/ public signage operation..

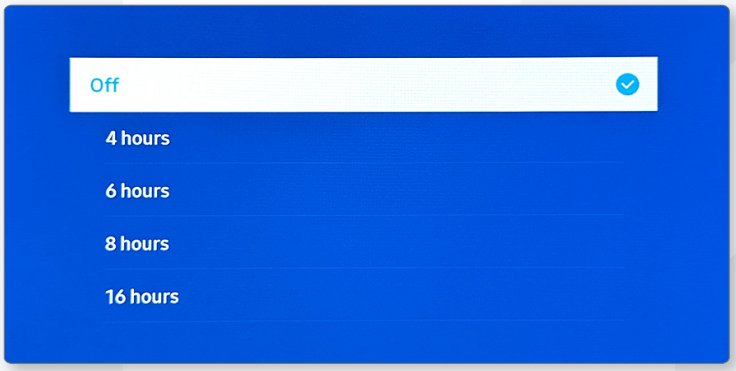

12. DATE AND TIME SETTINGS

- Check the displayed date and time and correct them if necessary, then select "**Next**".

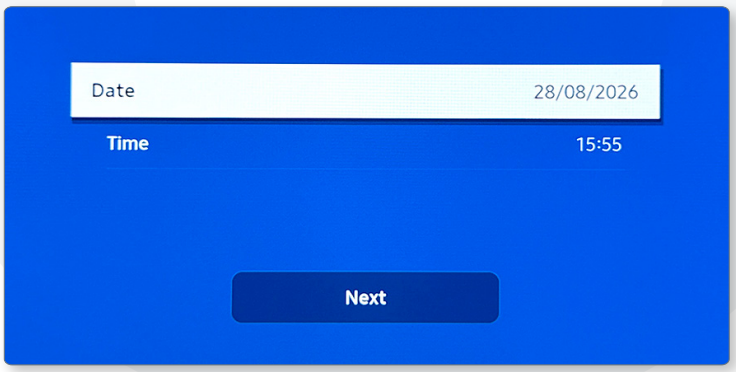


Weezago Ccommunication - 2026 -

TIZEN PROCEDURE – 2025 INTERFACE AND LATER –


13. SET THE PIN CODE

- Create a PIN code. Record it and keep it for internal use to protect access to the screen's security settings.

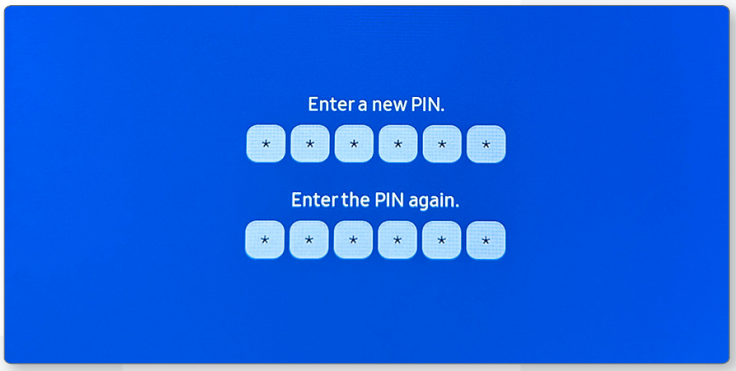


14. END THE TIZEN SETUP

- The Tizen Home screen appears (Favorites / Features / Sources / Settings). System configuration is now complete.

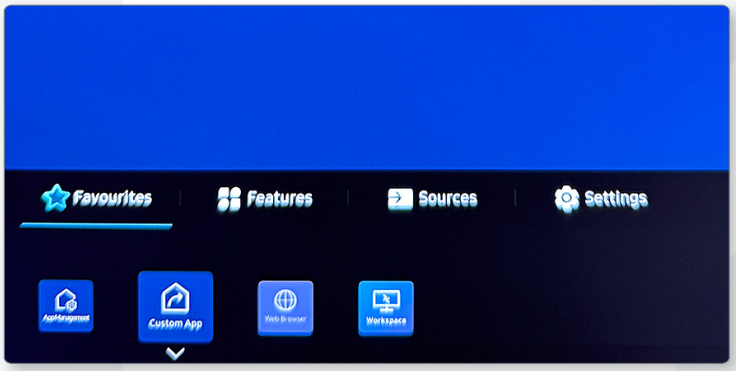

15. START THE WEEZAGO APPLICATION


- The Weezago application starts and displays "**Checking Configuration**".

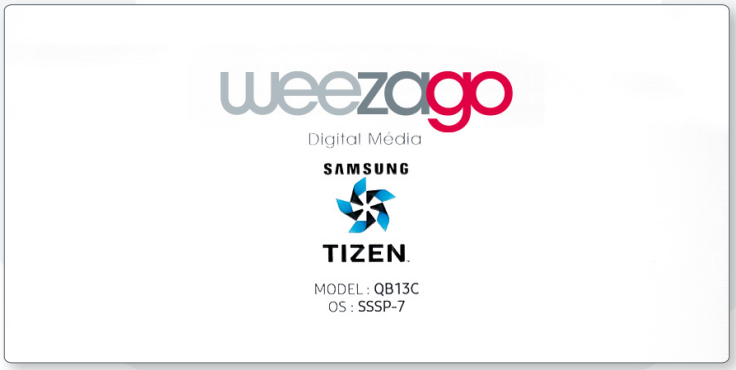

TIZEN PROCEDURE – 2025 INTERFACE AND LATER –

16. CUSTOM APPLICATION INSTALLATION

- The "**Install Custom App**" message is displayed while the application is being downloaded.

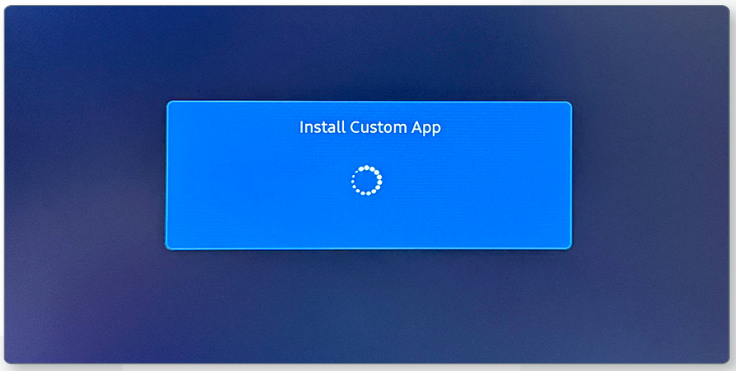


17. FIRST WEEZAGO STARTUP

- The screen displays the Weezago / Samsung Tizen 3.0 logo with the message "**First Start**".



18. SCREEN ACTIVATION

- The screen displays "**NEW DEVICE**", with the Model, S/N, MAC address and server **sssp.weezago.com**. Enter the 4-digit license code provided by Weezago (remote control + OK).

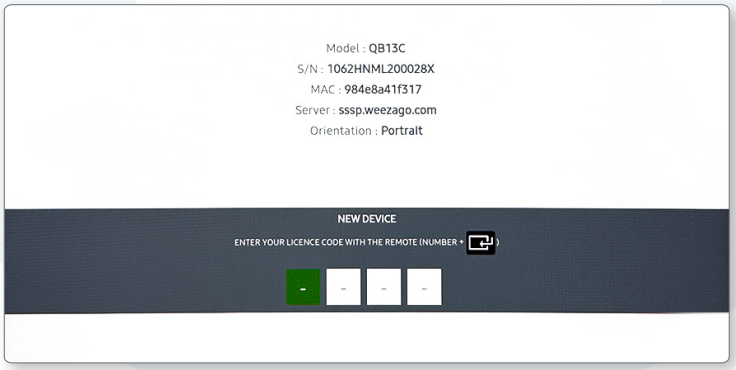


Weezago Ccommunication - 2026 -

TIZEN PROCEDURE – 2025 INTERFACE AND LATER –

19. PLAYER STARTUP

- The screen restarts the Weezago application and displays "**Start #3.6.6**".

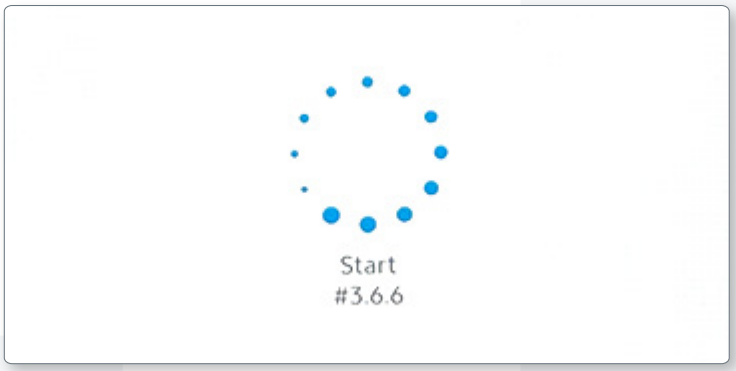

20. FINAL CHECK

- The "**Powered by Weezago**" logo appears briefly, then the scheduled content starts playing. Installation is complete.



weezago

DIGITAL SIGNAGE ECOSYSTEM

– WWW.WEEZAGO.COM –